



ENYA series

Up to 7 functions

7 time ranges

Wide input voltage range

1 change over contact

Width 17.5 mm

Installation design



Technical data

1. Functions

The function has to be set before connecting the relay to the supply voltage.

E	ON delay
R	OFF delay
Ws	Single shot leading edge with control input
Wa	Single shot trailing edge with control input
Es	ON delay with control input
Wu	Single shot leading edge voltage controlled
Bp	Flasher pause first

Function sets of the distinct types are according to table ordering information or printing on the unit.

2. Time ranges

Time range	Adjustment range	
1s	50ms	1s
10s	500ms	10s
1min	3s	1min
10min	30s	10min
1h	3min	1h
10h	30min	10h
100h	5h	100h

3. Indicators

Green LED U/t ON:	indication of supply voltage
Green LED U/t flashes:	indication of time period
Yellow LED R ON/OFF:	indication of relay output

4. Mechanical design

Self-extinguishing plastic housing, IP rating IP40
 Mounted on DIN-rail TS 35 according to EN 60715
 Mounting position: any
 Shockproof terminal connection according to VBG 4 (PZ1 required), IP rating IP20
 Tightening torque: max. 1Nm
 Terminal capacity:
 1 x 0.5 to 2.5mm² with/without multicore cable end
 1 x 4mm² without multicore cable end
 2 x 0.5 to 1.5mm² with/without multicore cable end
 2 x 2.5mm² flexible without multicore cable end

5. Input circuit

Supply voltage: terminals A1(+)-A2
 E1Z... 12-240VAC/DC: 12 to 240V AC/DC
 Tolerance: 12V -10% to 240V +10%
 E1Z... 24-240VAC/DC: 24 to 240V AC/DC
 Tolerance: 24V-15% to 240V+10%
 Rated consumption: 4VA (1.5W)
 Rated frequency: AC 48 to 63Hz
 Duty cycle: 100%
 Reset time: 100ms
 Residual ripple for DC: 10%
 Drop-out voltage: >30% of minimum rated supply voltage
 Overvoltage category: III (in accordance with IEC 60664-1)
 Rated surge voltage: 4kV

6. Output circuit

1 potential free change over contact
 Rated voltage: 250V AC
 Switching capacity: 2000VA (8A / 250V)
 Fusing: 8A fast acting
 Mechanical life: 20 x 10⁶ operations
 Electrical life: 2 x 10⁵ operations at 1000VA resistive load
 max. 6/min at 1000VA resistive load (in accordance with IEC 60947-5-1)
 Switching frequency: III (in accordance with IEC 60664-1)
 Overvoltage category: 4kV
 Rated surge voltage: 4kV

7. Control input

Input not potential free: terminals A1-B1
 Loadable: yes
 Max. line length: 10m
 Trigger level (sensitivity): automatic adaption to supply voltage
 Min. control pulse length: DC 50ms / AC 100ms

8. Accuracy

Base accuracy: ±1% of maximum scale value
 Adjustment accuracy: <5% of maximum scale value
 Repetition accuracy: <0.5% or ±5ms
 Voltage influence: -
 Temperature influence: ≤0.01% / °C

9. Ambient conditions

Ambient temperature: -25 to +55°C
 Storage temperature: -25 to +70°C
 Transport temperature: -25 to +70°C
 Relative humidity: 15% to 85%
 (in accordance with IEC 60721-3-3 class 3K3)
 Pollution degree: 2, if built-in 3 (in accordance with IEC 60664-1)

10. Weight

Single packing: 72g
 Package 10pcs: 670g per Package

Functions


ON delay (E)

When the supply voltage U is applied, the set interval t begins (green LED U/t flashes). After the interval t has expired (green LED U/t illuminated) the output relay R switches into on-position (yellow LED illuminated). This status remains until the supply voltage is interrupted. If the supply voltage is interrupted before the expiry of the interval t, the interval already expired is erased and is restarted when the supply voltage is next applied.




ON delay with control input (Es)

The supply voltage U must be constantly applied to the device (green LED U/t illuminated). When the control contact S is closed, the set interval t begins (green LED U/t flashes). After the interval t has expired (green LED U/t illuminated) the output relay R switches into on-position (yellow LED illuminated). This status remains until the control contact is opened again. If the control contact is opened before the interval t has expired, the interval already expired is erased and is restarted with the next cycle.

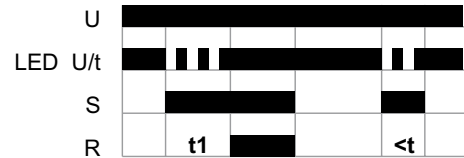


OFF delay (R)

The supply voltage U must be constantly applied to the device (green LED U/t illuminated). When the control contact S is closed, the output relay R switches into on-position (yellow LED illuminated). If the control contact is opened, the set interval t begins (green LED flashes). After the interval t has expired (green LED U/t illuminated) the output relay switches into off-position (yellow LED not illuminated). If the control contact is closed again before the interval t has expired, the interval already expired is erased and is restarted.

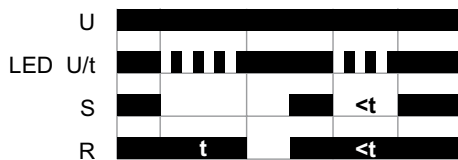


Single shot leading edge voltage controlled (Wu)

When the supply voltage U is applied, the output relay R switches into on-position (yellow LED illuminated) and the set interval t begins (green LED U/t flashes). After the interval t has expired (green LED U/t illuminated) the output relay switches into off-position (yellow LED not illuminated). This status remains until the supply voltage is interrupted. If the supply voltage is interrupted before the interval t has expired, the output relay switches into off-position. The interval already is erased and is restarted when the supply voltage is next applied.



Single shot leading edge with control input (Ws)

The supply voltage U must be constantly applied to the device (green LED U/t illuminated). When the control contact S is closed, the output relay R switches into on-position (green LED U/t illuminated) and the set interval t begins (green LED U/t flashes). After the interval t has expired (green LED U/t illuminated) the output relay switches into off-position (yellow LED not illuminated). During the interval, the control contact can be operated any number of times. A further cycle can only be started when the cycle run has been completed.

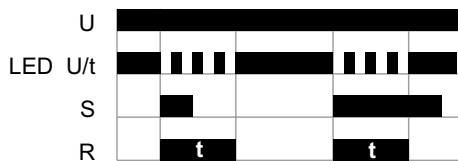


Bp – Cíclico simétrico, comienzo por pausa

Al aplicar la tensión U, el relé R conecta en un tiempo t, desarrollando un ciclo simétrico con tiempos t iguales de conexión y desconexión.




Single shot trailing edge with control input (Wa)

The supply voltage U must be constantly applied to the device (green LED U/t illuminated). Closing the control contact S has no influence on the condition of the output R. When the control contact is opened, the output relay switches into on-position (yellow LED illuminated) and the set interval t begins (green LED U/t flashes). After the interval t has expired (green LED U/t illuminated), the output relay switches into off-position (yellow LED not illuminated). During the interval, the control contact can be operated any number of times. A further cycle can only be started when the cycle run has been completed.

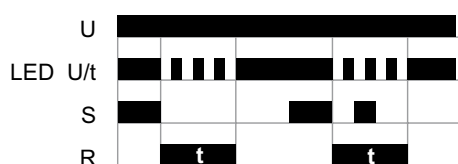


Connections


with control input

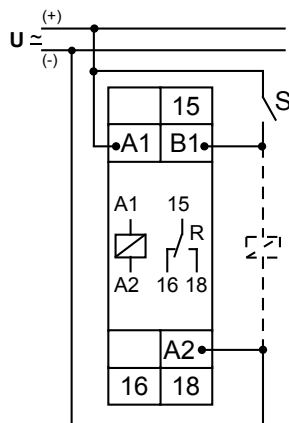

without control input

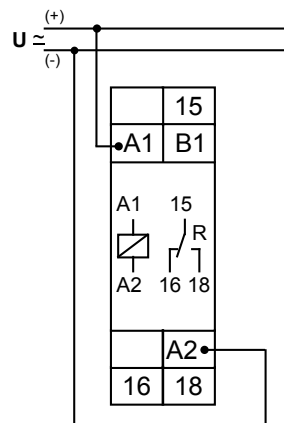

Dimensions

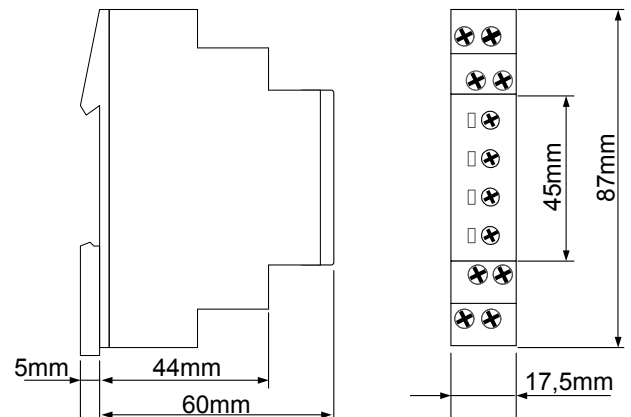

Ordering information

Types	Functions	Supply voltage	Part Nr. (PQ 1)	Part Nr. (PQ 10)
E1ZM10 12-240V AC/DC	E,R,Ws, Wa, Es, Wu, Bp	12-240V AC/DC	110100	110100A
E1ZM10 24-240V AC/DC	E,R,Ws, Wa, Es, Wu, Bp	24-240V AC/DC	110200	110200A
E1ZMQ10 24-240V AC/DC	E,R, Wu, Bp	24-240V AC/DC	110202	110202A
E1Z1E10 24-240V AC/DC	E	24-240V AC/DC		110204A
E1Z1R10 24-240V AC/DC	R	24-240V AC/DC		110205A

RELEASE 2009/07

Subject to alterations and errors