BEGA 77 941

Project · Reference number

Date

Product data sheet

Application

Floodlight with earthspike for temporary installation.

For floodlighting plants, flowers and small woodlands, for wall and other surfaces and for various lighting purposes in the private garden.

Product description

Floodlight made of glass-fibre reinforced polyamide Silicone gasket No tools are needed to adjust the operating position

Rotation range of floodlight 340° Swivel range -70°/+70°

Ready for connection with

5 m connecting cable H05RN-F $2\times1^{\,\square}$ and mains plug.

1 dummy screw gland Pg 7 Lampholder E 27

Safety class II

Protection class · power plug IP X4 Protection against splash water Protection class · luminaire IP 65 Dust tight luminaires and protected

against water jets \emptyset 0.5 m & minimum distance to the illuminated

surface **C €** – Conformity mark
Weight: 0.75 kg


PAR 38 must not be used.

Lamp

Pressed glass reflector bulb PAR $38 \cdot 60 \text{ W} \cdot \text{E } 27$ 470 lm PAR $38 \cdot 80 \text{ W} \cdot \text{E } 27$ 670 lm PAR $38 \cdot 120 \text{ W} \cdot \text{E } 27$ 1100 lm Narrow beam – Spot $\cdot 12^\circ$ Broad beam – Flood $\cdot 30^\circ$ Cool beam reflector lamps

Please note the lamp manufacturers' operating instructions.



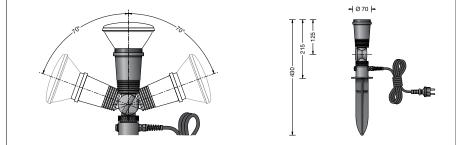

Light technique

>>₩

Floodlight with rotationally symmetrical light distribution.

Narrow beam when using spot type pressed glass reflector bulb giving punctiform light beam over short distances:

Half beam angle 12°

PAR 38 · 60/80/120 W - Spot -

Wide beam when using flood type pressed glass reflector bulb giving a wide light beam over short distance.

Half beam angle 30°

PAR 38 · 60/80/120 W - Flood -

Accessories

Permanent connecting pillar for electrical connection of portable garden luminaires and electric gardening tools. They are used for switching tools and lighting equipment.

70375 with 2 socket outlets

70376 with 1 socket outlet + 1 switch

70377 with 4 socket outlets

70378 with 3 socket outlets + 1 switch

For the accessories a separate instructions for use can be provided upon request.