

liniLED® Top Connector Set


liniLED®

Instruction sheet

Productcode 11200/11201

Protection: **IP40**

Operating Temperature: -20°C ... 55°C

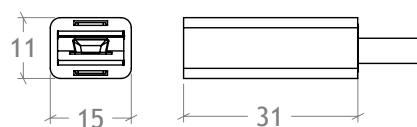

For all specifications see datasheets at www.liniLED.com



	LED/m	V DC	W/m	lm/m	°C	max. ↔	 B50/L70
Deco	35	24	max. 3.3	max. 111.56	-20 ... 55	20 m	50,000 (B50/L50)
Deco Colours	35	24	max. 4.4	max. 97.41	-20 ... 55	20 m	50,000 (B50/L50)
Power	35	24	max. 4.6	367.92	-20 ... 55	10 m	50,000
Power Colours	60	24	max. 8.3	max. 144.54	-20 ... 55	10 m	50,000
Power Short Pitch	120	24	9.7	max. 741.11	-10 ... 55	10 m	50,000

