


Number of contacts

32 +

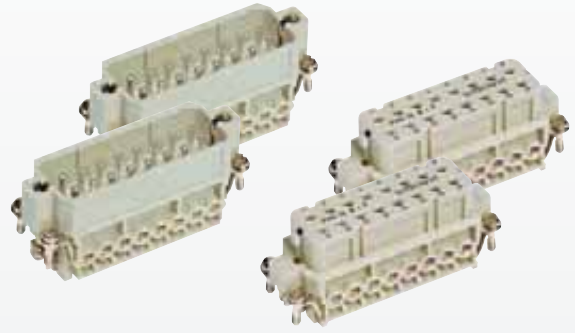

Inserts

Identification	Series	Part No.		Drawing	Dimensions in mm
		Male insert (M)	Female insert (F)		

Screw terminal



Han A®


1–16
17–32

09 20 016 2612
09 20 016 2613

09 20 016 2812
09 20 016 2813

Dimensions for inserts see page 01.16

Contact arrangement View from termination side



Crimp terminal

Order crimp contacts separately




Han A®

1–16
17–32

09 20 016 3001
09 20 016 3011

09 20 016 3101
09 20 016 3111

Panel cut out for inserts for use without hoods/housings



Identification	Wire gauge (mm²)	Part No.		Drawing	Dimensions in mm
		Male contacts	Female contacts		

Crimp contacts

Power contacts


silver plated



0.5
0.75
1.0
1.5
2.5
3
4

09 33 000 6121
09 33 000 6114
09 33 000 6105
09 33 000 6104
09 33 000 6102
09 33 000 6106
09 33 000 6107

09 33 000 6220
09 33 000 6214
09 33 000 6205
09 33 000 6204
09 33 000 6202
09 33 000 6206
09 33 000 6207



gold plated



0.5
0.75
1.0
1.5
2.5
4.0

09 33 000 6122
09 33 000 6115
09 33 000 6118
09 33 000 6116
09 33 000 6123
09 33 000 6119

09 33 000 6222
09 33 000 6215
09 33 000 6218
09 33 000 6216
09 33 000 6223
09 33 000 6221

Crimp contact identification

Identification	Wire gauge	AWG	Stripping length
no groove	0.5 mm²	AWG 20	7.5 mm
1 groove*	0.75 mm²	AWG 18	7.5 mm
1 groove	1 mm²	AWG 18	7.5 mm
2 grooves	1.5 mm²	AWG 16	7.5 mm
3 grooves	2.5 mm²	AWG 14	7.5 mm
wide groove	3.0 mm²	AWG 12	7.5 mm
no groove	4 mm²	AWG 12	7.5 mm

* on the back crimp collar

Han A