



AUXILIARY SWITCH BLOCK, 22, 2NO+2NC,
DIN EN50005, SCREW CONNECTION,
F. CONTACTOR RELAYS A. CONTACT. FOR SWITCHING
MOTORS,
SIZE S00

Auxiliary circuit:

Number of NC contacts / for auxiliary contacts

- instantaneous switching

2

Number of NO contacts / for auxiliary contacts

- instantaneous switching

2

Operating current / of the auxiliary contacts / at AC-15

- at 230 V

A

6

Installation/mounting/dimensions:

Type of mounting

snap-on mounting

Connections:

Design of the electrical connection

- for auxiliary and control current circuit

screw-type terminals

Certificates/approvals:

General Product Approval

Functional Safety /
Safety of
Machinery

Declaration of
Conformity



CCC



CSA



GOST



UL

[Type Examination](#)



EG-Konf.

Test Certificates

[Special Test
Certificate](#)

Shipping Approval



ABS



BUREAU
VERITAS



GL



LRS



RINA



RMRS

other

[other](#)

[Environmental
Confirmations](#)

Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)

<http://www.siemens.com/industrial-controls/mall>

Cax online generator:



<http://www.siemens.com/cax>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/3RH1911-1FA22/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3RH1911-1FA22

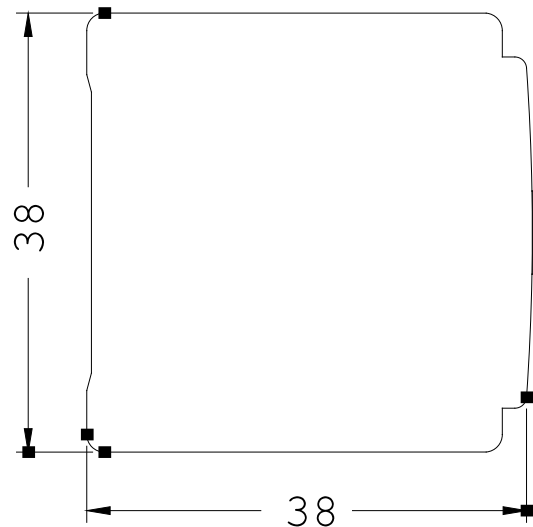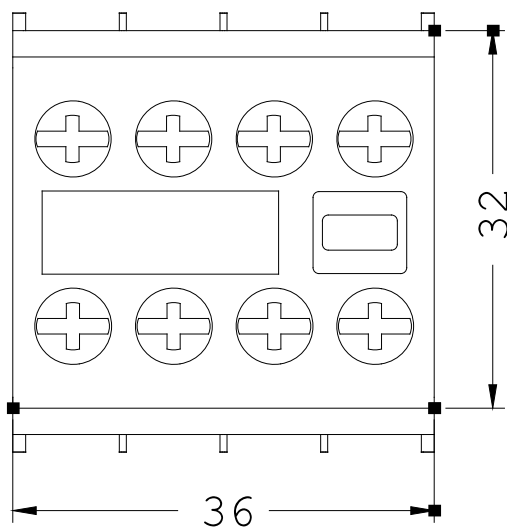

last change:

Nov 5, 2012