

Printview: Female connector for reverse mounting; with standard marking; 3-pole; for screw or screwless mounting; with coding mask - Item No.: 272-403/272-486

WAGO® online catalog / eShop

Female connector for reverse mounting; with standard marking; 3-pole; for screw or screwless mounting; with coding mask

Item No.: 272-403/272-486



Female connector for reverse mounting; with standard marking; 3-pole; for screw or screwless mounting; with coding mask

Marking

RoHS ✓
Compliant

Business data

Supplier	WAGO
Item no.	272-403/272-486
GTIN / EAN	4044918406161
Content	1
Order amount	500
Customer item number	

Notes

Technical data

Miscellaneous

No. of poles	3
Color	white/gray
Pollution degree (1)	3
Rated voltage EN (1) [V]	200 [V]
Rated surge voltage (1) [kV]	4 [kV]
Nominal current [A]	16 [A]
Degree of pollution (2)	2
Rated voltage EN (2) [V]	400 [V]



Technical data	
Rated surge voltage (2) [kV]	4 [kV]
Number of individual connection objects at the product	1
Connection technology (1)	PUSH WIRE®
Strip length 1	8 ... 9 mm / 0.31 ... 0.35 in
Fire load [MJ]	0.395 [MJ]
Weight [g]	12.005 [g]
Width	33 mm / 1.299 in
Height	35.2 mm / 1.386 in
Length	20 mm / 0.787 in

Accessories

Strain relief		
Item no.	Description	Pack. unit (Sub Pack)
272-497	Strain relief housing; for 2 multicore cables max.; 3-pole	500
272-492	Strain relief support; for 2 multicore cables max.; 3-pole; with clamp	500

General accessory		
Item no.	Description	Pack. unit (Sub Pack)
210-176	Crimping tool; for pin terminals	1
210-719	Operating tool with partially insulated shaft; Type 1, blade (2.5 x 0.4) mm; suitable for 279, 726, 727, 2000, 2001 and 2020 series	1
209-157	Pin terminals; insulated; suitable for 271 and 272 Series	100
209-151	Pin terminals; insulated; suitable for 271 and 272 Series	100
209-164	Pin terminals; insulated; suitable for 271 and 272 Series	100

Images & drawings

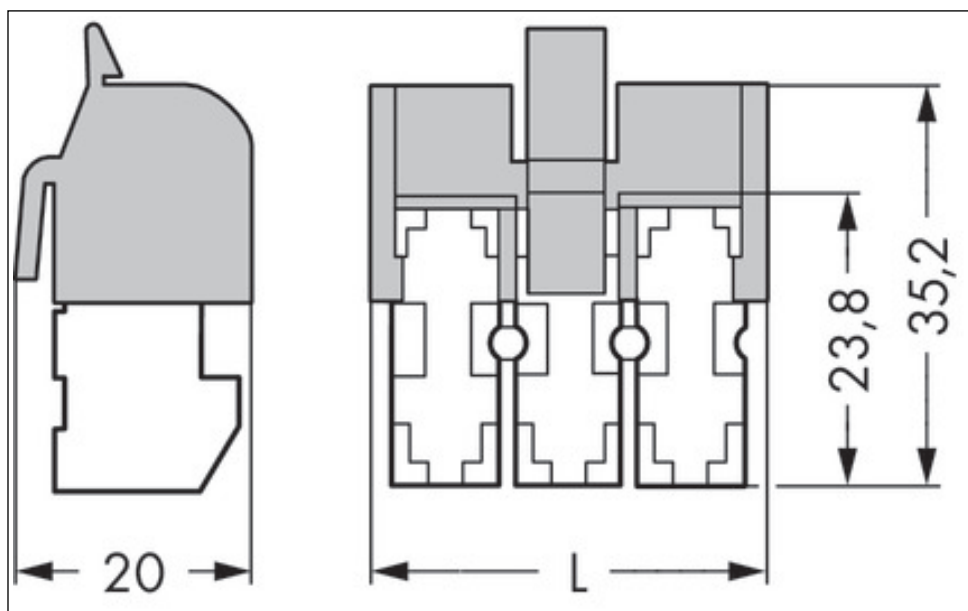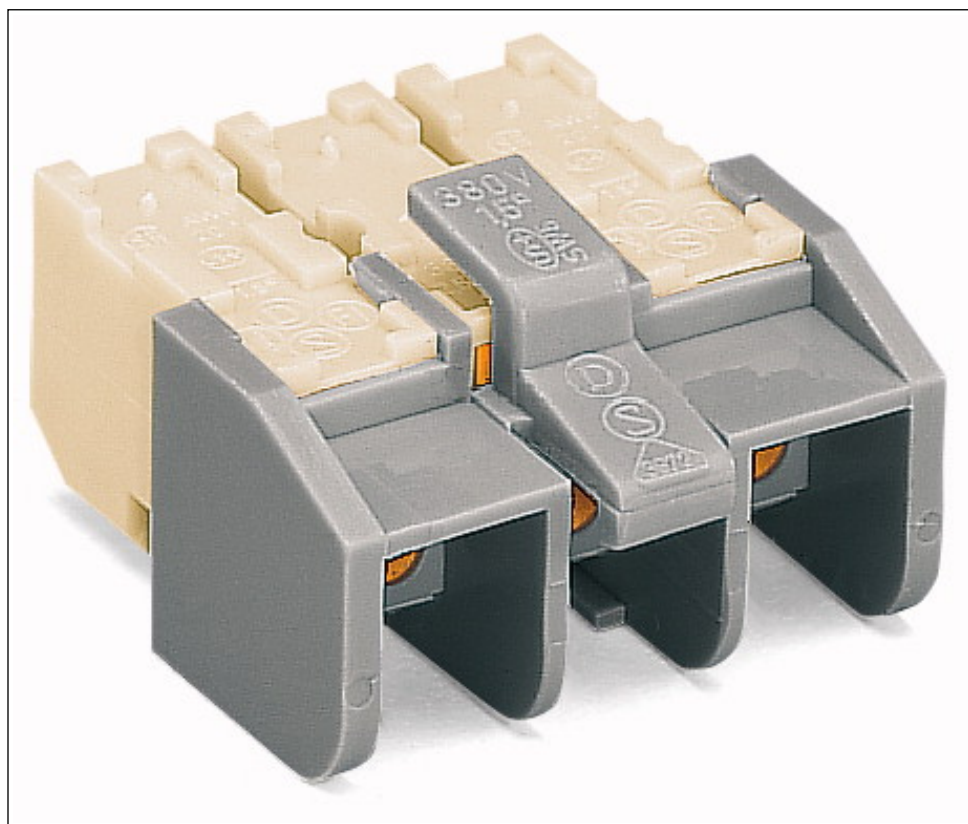

Address

WAGO Kontakttechnik GmbH & Co. KG

Hansastr. 27

32423 Minden

Telefon: 0571/887-0

Fax: 0571/887-169

<http://www.wago.com>

© WAGO Kontakttechnik GmbH & Co. KG

Technische Änderungen und Irrtümer vorbehalten.