


Article-No: 1251373

Diffuser Luminaires

Luminaire LUNA-N 1x58W EVG, IP 66



Damp proof - diffuser lamp for T8, diffuser made of PC, housing made of grey glass fibre reinforced polyester, silicone seal round circuit, delivery incl. ceiling fastening clip, locking clip made of stainless steel, reflector made of metal, painted white, through-wiring with optional kit available, with cable entry front and side of the ceiling, suitable for ceiling mounting; pendulum, carrier rail and horizontal wall mounting possible with accessories.

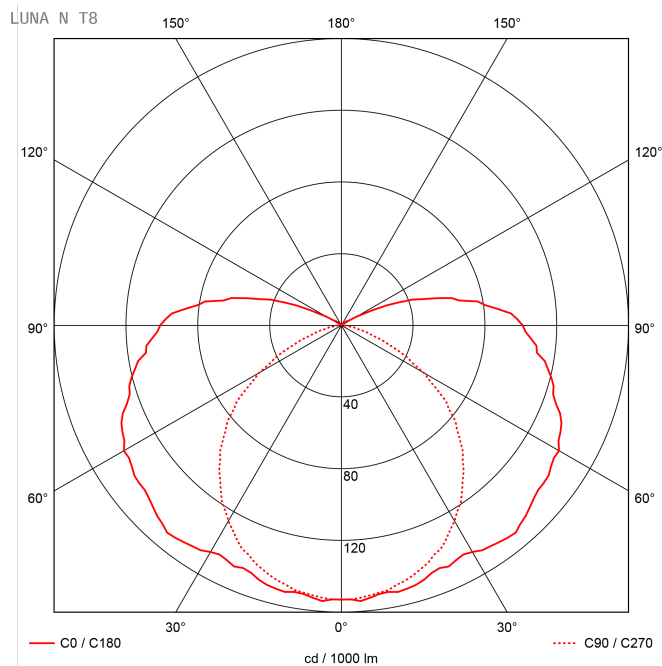

EAN 4018098214700

Statistical product number 94054035

LAMP

Product type	LL T8-26mm
Number of lamps /LED-rows	1
Color temperature K	-
Color tolerance (initial MacAdam)	-

POWER

Lamp power W	58
--------------	----

LIGHT ENGINEERING

Light distribution	wide beam
Unified Glare Rating UGR 4H 8H C0 C90	25.9 / 17.6

TECHNICAL DATA

Nominal voltage	220-240V 0/50/60 Hz
Protection class SK	I
Ballast	EVG on/off
Through-wiring mm ²	as optional accessories available
Glow wire test	650 °C - 5 sec.
D-rating	yes
Certification mark	ENEC
Type of voltage	AC/DC

CAPACITY

IK-Impact resistance	06
Warranty (years)	2
L80/B10 Lebensdauer bei 25°C	-
L70/B50 Life expectancy at 25°C	-
Unprotected outdoor areas	not suitable
max. lowest temperature in °C	-20
max. highest temperature in °C	35
Ingress protection class	66
Agricultural use	unsuitable

DIMENSIONS AND WEIGHT

Length mm	1578
Width mm	86
Height mm	94
Weight netto in kg	2.6

PACKAGING

Length m VPE	1.665
Width VPE in m	0.095
Height VPE in m	0.1
Weight incl. packaging kg	2.9

ASSEMBLY AND MAINTENANCE

Standard installation	Ceiling
Optional installation	Pendulum, Rail installation, horizontal wall
exchangeable LED board	not possible

MATERIAL

Case color	grey RAL 7035
Renewable resources possible	no
Housing material	Fiberglass
Cover material	PC

The right of error and later technical developments is reserved.

State: 14.05.2020