


Article-No: 2206013

Tubular Luminaires

Luminaire TUBIS 2x58W EVG



Tubular luminaire for T8, electronic ballast integrated in housing, diameter 90mm, tubular housing made of Polycarbonate, luminaire 360° rotatable, substantially acid and alkali resistant, short, ageing-resistant silicone seals, variable mounting points through PRACHT clamps made of stainless steel, suitable for ceiling-, horizontal and vertical wall mounting, accessories for pendant and mounting rail installation available for order. Attention: PRACHT MANUFACTORY! Do you need a different color temperature, housing color or through-wiring? Specific challenges? No problem. We deliver customized solutions.

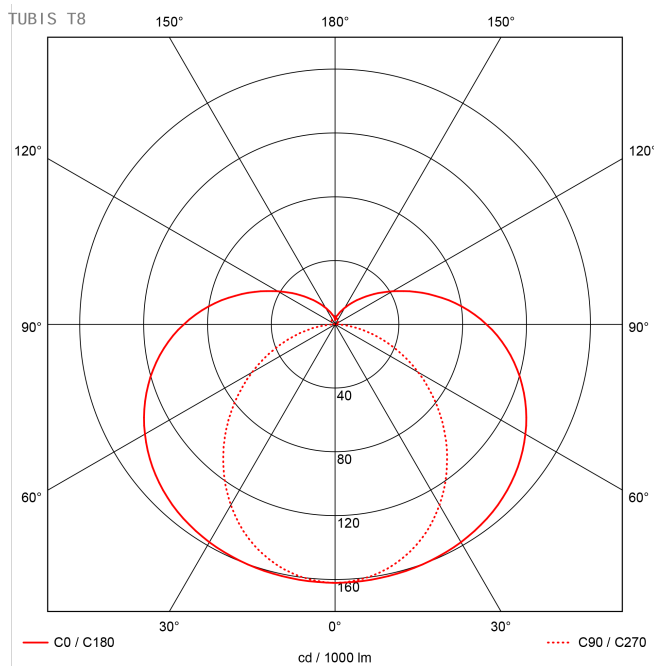

EAN 4018098126096

Statistical product number 94054035

LAMP

Product type	LL T8-26mm
Number of lamps /LED-rows	2
Color temperature K	-
Color tolerance (initial MacAdam)	-

POWER

Lamp power W	58
--------------	----

LIGHT ENGINEERING

Light distribution	wide beam
Light distribution angle in °	130
Unified Glare Rating UGR 4H 8H C0 C90	26.2 / 22.0

TECHNICAL DATA

Nominal voltage	220-240V 0/50/60 Hz
Protection class SK	II
Ballast	EVG on/off
Through-wiring mm ²	without
Glow wire test	850 °C - 5 sec.
D-rating	yes
Certification mark	ENEC
Type of voltage	AC/DC

CAPACITY

IK-Impact resistance	08
Warranty (years)	3
L80/B10 Lebensdauer bei 25°C	-
L70/B50 Life expectancy at 25°C	-
Unprotected outdoor areas	not suitable
max. highest temperature in °C	35
Ingress protection class	68 + x9K
Agricultural use	unsuitable

DIMENSIONS AND WEIGHT

Length mm	1655
Width mm	90
Height mm	105
Outside diameter in mm	90
Weight netto in kg	5.5

PACKAGING

Length m VPE	1.85
Width VPE in m	0.1
Height VPE in m	0.09
Weight incl. packaging kg	5.8

ASSEMBLY AND MAINTENANCE

Standard installation	Ceiling, horizontal and vertical wall
Optional installation	Pendulum, Rail installation
exchangeable LED board	not possible

MATERIAL

Case color	opaque
Renewable resources possible	no
Housing material	PC-polycarbonate
Cover material	PC

The right of error and later technical developments is reserved.

State: 14.05.2020