

**BEGA****33 668**

Lichtbaustein ®



Project · Reference number


Date

## Product data sheet

### Application

**Lichtbaustein®** Rectangle  
Ceiling and wall luminaire for many lighting tasks.  
Ideal for places where a soft and uniform  
lighting distribution is required.  
For interior and exterior applications.

### Product description

Luminaire made of aluminium alloy  
and stainless steel  
BEGA Unidure® coating technology  
Opal glass satin matt  
1 fixing hole  $\varnothing$  5 mm  
1 cable entry for mains supply cable  
up to  $\varnothing$  10,5 mm max.  $3 \times 1,5$ <sup>□</sup>  
Lampholder terminal 2.5<sup>□</sup>  
Earth conductor connection  
Lampholder E 27  
Safety class I  
Protection class IP 44  
Protected against granular foreign bodies  
> 1 mm and splash water  
Impact strength IK04  
Protection against mechanical  
impacts < 0.5 joule  
 – Safety mark  
**CE** – Conformity mark  
Weight: 0.9 kg

### Lamp

Luminaire with lampholder E 27  
Lamp output max. 60 W

For this luminaire we recommend the following  
BEGA LED lamps:



**13510** LED 7 W · 805 lm · 2700 K

**13548** LED 7 W · 805 lm · 2700 K  
dimable

**13584** LED 7 W · 805 lm · 3000 K

**13586** LED 7 W · 805 lm · 3000 K  
dimable

Detailed technical and lighting data for the  
lamps can be found in the data sheets on our  
website.

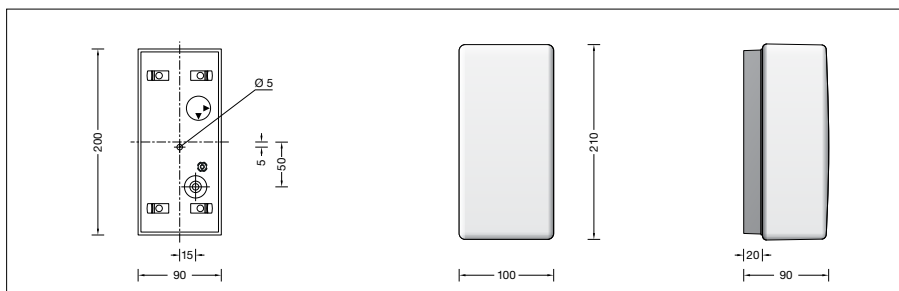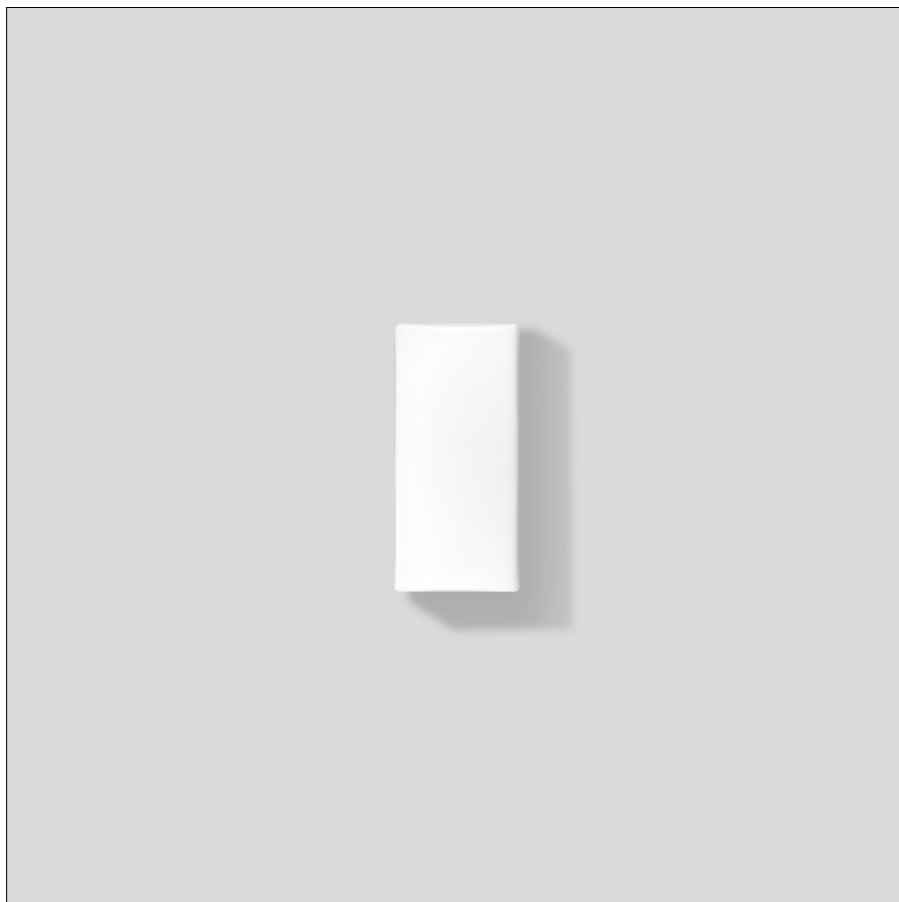

### Light technique

Luminaire data for the light planning program  
DIALux for outdoor lighting, street lighting and  
indoor lighting as well as luminaire data in  
EULUMDAT- and IES-format you will find on the  
BEGA web page [www.bega.com](http://www.bega.com).

### Light distribution

