

**BEGA****77 380**

Floodlight

IP 55

Project · Reference number

Date

**Product data sheet****Application**

Portable floodlight with earthspike and mains supply cable with safety plug for temporary installation.

For illuminating walls, facades or advertising boards and for many other lighting applications in garden architecture.

**Product description**

Floodlight made of aluminium alloy and stainless steel  
 Earth spike made of UV-resistant glass - fibre reinforced polyamide synthetic  
 Silicone gasket  
 Swivel range -20°/+70°  
 Factory pre-wired with 5 m connecting cable H05RN-F 3 G 1<sup>□</sup> and power plug  
 Lampholder E 27  
 Safety class I  
 Protection class safety plug IP X4  
 Protected against splash water  
 Protection class floodlight IP 55  
 Dusttight and protected against water jets  
 ⌀ 0.5 m ⚡ minimum distance to the illuminated surface  
 CE – Conformity mark  
 Weight: 1.5 kg

**Light technique**

Floodlight with rotationally symmetrical light distribution.

Narrow beam when using spot type pressed glass reflector bulb giving punctiform light beam over short distances:

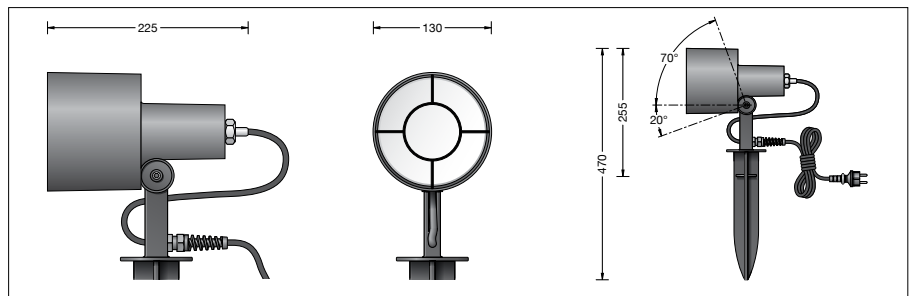
Half beam angle 12°

PAR 38 · 60/80/120 W – Spot –

Wide beam when using flood type pressed glass reflector bulb giving a wide light beam over short distance.

Half beam angle 30°

PAR 38 · 60/80/120 W – Flood –

**Lamp**

Pressed glass reflector bulb  
 PAR 38 · E 27  
 Osram: Spot 12° · Flood 30°  
 PAR 38 60 W · E 27 600 lm  
 PAR 38 80 W · E 27 800 lm  
 PAR 38 120 W · E 27 1200 lm

Please note the lamp manufacturers' operating instructions.

**Accessories**

Permanent connecting pillar for electrical connection of portable garden luminaires and electric gardening tools. They are used for switching tools and lighting equipment.

**70375** with 2 socket outlets

**70376** with 1 socket outlet + 1 switch

**70377** with 4 socket outlets

**70378** with 3 socket outlets + 1 switch

For the accessories a separate instructions for use can be provided upon request.