


BEGA

77 945

Floodlight



Project · Reference number

Date


Product data sheet

Application

Floodlight with mounting box for interior and exterior applications.
 For permanent installation on a wall, under a ceiling or on a pillar.
 For floodlighting plants and small woodlands, for wall and other surfaces and for various lighting purposes in the private sector.

Product description

Floodlight made of glass-fibre reinforced polyamide
 No tools are needed to adjust the operating position
 Rotation range of mounting box 340°
 Swivel range -70°/+70°
 2 fixing holes ø 5 mm
 60 mm spacing
 2 cable entries for through-wiring of mains supply cable ø 7-10,5 mm, max. 3G1.5[□]
 Connecting terminals 2.5[□]
 Lampholder E 27
 Safety class II
 Protection class IP 65
 Dust-tight and protection against water jets
 0.5 m minimum distance to the illuminated surface
 – Safety mark
 – Conformity mark
 Weight: 0.35 kg

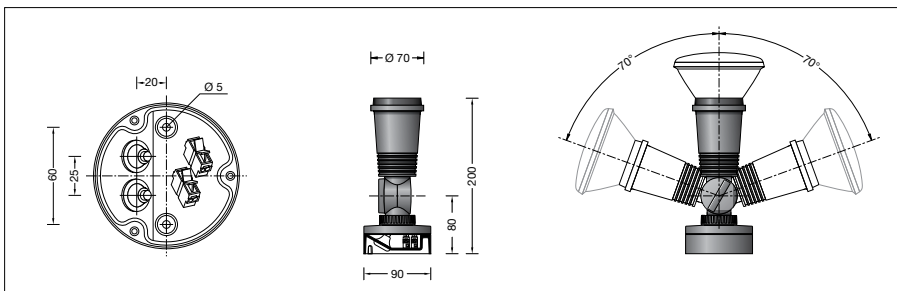

Lamp

Pressed glass reflector bulb
 PAR 38 · 60 W · E 27 470 lm
 PAR 38 · 80 W · E 27 670 lm
 PAR 38 · 120 W · E 27 1100 lm
 Narrow beam – Spot · 12°
 Broad beam – Flood · 30°
 Cool beam reflector lamps
 PAR 38 must not be used.



Light distribution

