

Start Waterproof LED

START WATERPROOF LED 1565MM T NW 6500LM

0047803



Product features

- Weather resistant LED Luminaire, 1565MM with Twin Lamp, 60W at 4000K, 108lm/W. UV stabilised polycarbonate cover with specially designed opal lens - softens and control the light whilst optimising output. No yellow staining. Highly efficient electronic driver included as standard. Smooth body finish, easy to handle. Minimal maintenance with no replacement of lamps . Through wiring achievable. IP65 rating and IK08 body durable for harsh locations. Professionally finished with Stainless Steel brackets. Suspension compatible.



PRODUCT OVERVIEW

Code IPC	0047803
Nom du produit	START WATERPROOF LED 1565MM T NW 6500LM
Technologie	LED
Type	Integrated LED
Housing material	Polycarbonate
Montage	Surface or Suspended (with accessory 0045600)
Indice du dispositif	Enclosed
Environnement	Internal/External with protection
Application générale	Education, Hospitality, Logistics & Industry, Museums & Galleries, Office, Retail, Residential & Consumer
Certifications	EUNEW009
ETIM Class	EC000109
Fixture luminous flux (lm)	6500
Luminaire efficacy (lm/W)	108.33
LOR (%)	100
Température de couleur (K)	4000
Couleur de lumière	Neutral White
Colour Consistency (SDCM)	6
Consommation électrique totale (W)	60
Protection électrique	Class I
Type d'appareillage	Electronic
Durée de vie moyenne (nominale) (h)	50000
Housing colour	Grey
Indice de protection IP	IP65
Indice de protection IK	IK08
Code EAN	5410288478036
Lampes	Yes
Lampe incluse	INTEGRATED LED

Start Waterproof LED

START WATERPROOF LED 1565MM T NW 6500LM

0047803

TABLEAU DE DONNÉES

Données générales

Code IPC	0047803
Nom du produit	START WATERPROOF LED 1565MM T NW 6500LM
Technologie	LED
Type	Integrated LED
Housing material	Polycarbonate
Montage	Surface or Suspended (with accessory 0045600)
Indice du dispositif	Enclosed
Environnement	Internal/External with protection
Application générale	Education, Hospitality, Logistics & Industry, Museums & Galleries, Office, Retail, Residential & Consumer
Operating Temperature Range (°C)	-30 to +40
Certifications	EUNEW009
ETIM Class	EC000109

Données optiques

Fixture luminous flux (lm)	6500
Luminaire efficacy (lm/W)	108.33
LOR (%)	100
Température de couleur (K)	4000
Correlated colour temperature range (K)	4000
Couleur de lumière	Neutral White
Colour Consistency (SDCM)	6
Chromaticité réglable	N
Type de distribution	Direct

Caractéristiques électriques

Consommation électrique totale (W)	60
Tension secteur (V)	220-240V~
Protection électrique	Class I
Type d'appareillage	Electronic
Transformateur requis	Yes
Courant (mA)	1400
Courant d'appel (A)	9
Test du fil incandescent	850
Max. Luminaires par disjoncteur 16A	25
Max. Luminaires per 20A C Breaker	38
Max. Luminaires per 16A B Breaker	29
Max. Luminaires per 20A B Breaker	35

Start Waterproof LED

START WATERPROOF LED 1565MM T NW 6500LM

0047803

Durée de vie

Durée de vie moyenne (nominale) (h)	50000
--	-------


Données physiques

Housing colour	Grey
Indice de protection IP	IP65
Indice de protection IK	IK08
Finition du diffuseur	Opal
Matériau du diffuseur	Polycarbonate
Finition réflecteur	Polycarbonate Diffuser
Longueur (mm)	1565
Largeur (mm)	123
Hauteur (mm)	91
Poids (kg)	2.58

Emballage

Description de l'emballage	Mix blister(20% carton, 80% pl)
Code EAN	5410288478036
Longueur simple de l'emballage (cm)	9.5
Largeur simple de l'emballage (cm)	12.2
Hauteur simple de l'emballage (cm)	156.6
DUN14 (outer)	05410288478036
Units per outer package	1
Packaging outer length (cm)	156.6
Packaging outer width (cm)	12.2
Packaging outer height (cm)	9.5

PHOTOMÉTRIE

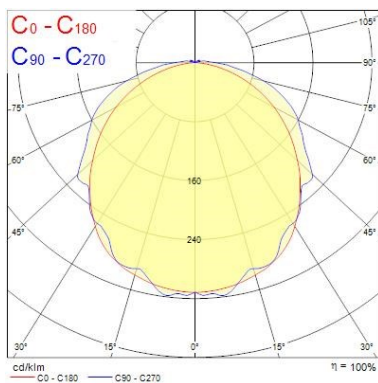

Distance [m]	Cone diameter [m]	E ₀ [lx]	E _{10%} [lx]	E _{5%} [lx]
0.5	1.83 1.37	6143	613*	680
1.0	3.65 2.74	2038	613*	115
1.5	5.48 4.11	905	613*	51
2.0	7.31 5.49	509	613*	29
2.5	9.13 6.86	325	613*	18
3.0	10.96 8.23	225	613*	13

illuminance [lx]


Distance [m] Cone diameter [m]
 C0 - C180 (Half beam angle: 107.8°)
 C90 - C270 (Half beam angle: 122.6°)

Start Waterproof LED


START WATERPROOF LED 1565MM T NW 6500LM

0047803

SCHÉMAS TECHNIQUES

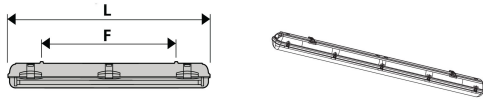


SYLVANIA 0047803

 This luminaire contains built in LED lamps.

A⁺⁺
A⁺
A
B
C
D
E

} **LED**


The lamps cannot be changed in the luminaire.

874/2012 

Start Waterproof LED


START WATERPROOF LED 1565MM T NW 6500LM

0047803




This luminaire contains built in LED lamps.

The lamps cannot be changed in the luminaire.



**L
E
D**



SYLVANIA 0047803 874/2012