



Product datasheet **LED DRIVER AC/500mA CC** code: X0_ _

Description

EN Fully encapsulated driver with IP67 level (except X076).
 Cooling by free air convection.
 Suitable for LED.

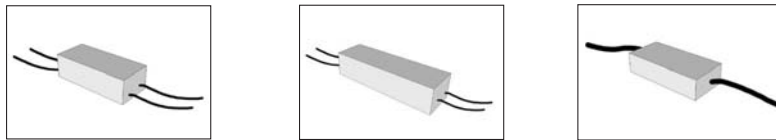


	X030	X033	X076
Product code : Code produit : Produkt-Code :			
Power : Puissance : Leistung :	1-12W	6-26W	35-54W
Dimensions :	81 x 35 x 23 mm	133 x 40 x 30 mm	128 x 60 x 32 mm
Input :	120-240V 50-60Hz	220-240V 50-60Hz	220-240V 50-60Hz
Output :	2-26V DC	12-52V DC	70-108V DC
Driver type :	500 mA	500mA	500mA
Dimmable :	no	yes (100% ->25%) Dimmable with Trailing Edge dimmers	no
Classification :	CE - IP67 - Classe II	CE - IP67 - Classe II	CE - IP30 - Classe II
Working temperature :	-25° → 50° C	-25° → 50° C	-25° → 50° C
Protections :	- Electrical internal Selfresettable short circuit - Input voltage surge - Thermal		- Short circuit - Over temperature
Weight :	0,17 kg	0,28 kg	0,24 kg
Warranty : Garantie :	2 + 3 years optional	2 + 3 years optional	3 years

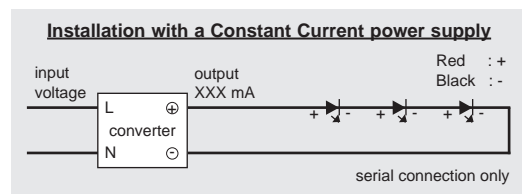

Product datasheet **LED DRIVER AC/500mA CC** code: X0_ _

Description

EN Fully encapsulated driver with IP67 level.
 Cooling by free air convection.
 Suitable for LED.

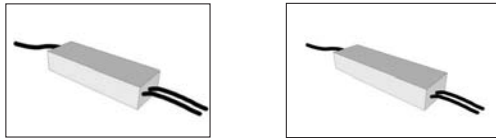

Product code :	X077	X078
Code produit :		
Produkt-Code :		
Power :		
Puissance :	10-60W	60-135W
Leistung :		
Dimensions :	189 x 62 x 37 mm	245 x 68 x 39 mm
Input :	220-240V 50-60Hz	220-240V 50-60Hz
Output :	13-130V DC	30-300V DC
Driver type :	500mA	500mA
Dimmable :	yes (100% -> 60%) Dimmable with 1-10VDC, PWM signal, resistance	yes (100% -> 60%) Dimmable with 1-10VDC, PWM signal, resistance
Classification :	CE - IP67 - Classe II	CE - IP67 - Classe II
Working temperature :	-40° → 70° C	-40° → 70° C
Protections :	- Short circuit - Over temperature	- Short circuit - Over temperature - Over voltage
Weight :	0,82 kg	1,24 kg
Warranty :		
Garantie :	2 + 3 years optional	2 + 3 years optional

