


Article-No: 1215270

Diffuser Luminaires

Luminaire ÄTNA ZONE II 2x36W



Explosion-proof diffuser luminaire for T8, cover made of PC (polycarbonate, impact resistant, IK10) with dense luminaire housing made of grey glass fibre reinforced polyester, electronic ballast integrated in luminaires, short, ageing-resistant silicone seals, variable mounting points through PRACHT-CLIP-SYSTEM made of stainless steel, ceiling, pendant and wall mounting possible with accessories available for order.

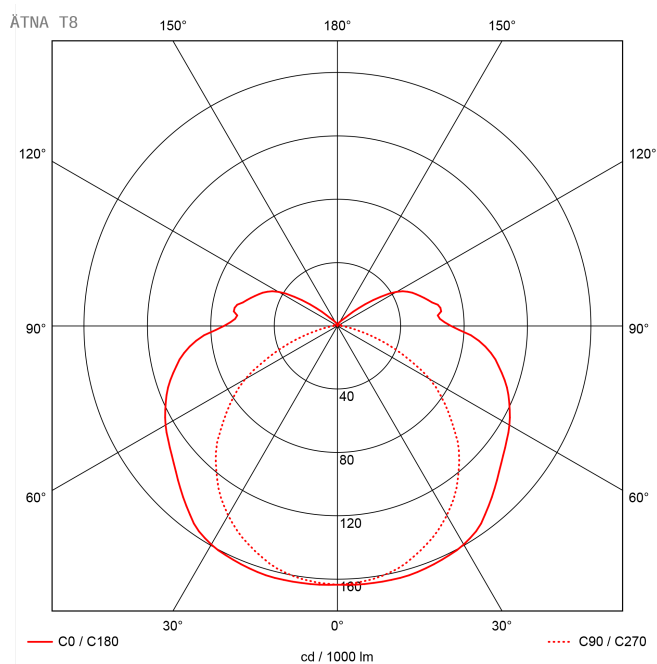

EAN

4018098204848

Statistical product
number

94054035

LAMP

Product type	LL T8-26mm
Number of lamps /LED-rows	2
Color temperature K	-
Color tolerance (initial MacAdam)	-

POWER

Lamp power W	36
--------------	----

LIGHT ENGINEERING

Light distribution	wide beam
Unified Glare Rating UGR	23.4 / 18.0
4H 8H C0 C90	

TECHNICAL DATA

Nominal voltage	220-240V 0/50/60 Hz
Protection class SK	I
Ballast	EVG on/off
Through-wiring mm ²	5x2,5
Glow wire test	850 °C - 5 sec.
D-rating	no
Type of voltage	AC/DC
Circuit breaker B10A	12
Circuit breaker B16A	20
Circuit breaker C10A	20
Circuit breaker C16A	34

CAPACITY

IK-Impact resistance	10
Warranty (years)	1
L80/B10 Lebensdauer bei 25°C	-
L70/B50 Life expectancy at 25°C	-
Unprotected outdoor areas	not suitable
max. lowest temperature in °C	-30
max. highest temperature in °C	55
Ingress protection class	66 / 67
Agricultural use	unsuitable
Attribute	explosion proof

DIMENSIONS AND WEIGHT

Length mm	1310
Width mm	184
Height mm	100
Weight netto in kg	6.5

PACKAGING

Length m VPE	1.365
Width VPE in m	0.19
Height VPE in m	0.135
Weight incl. packaging kg	6.7

ASSEMBLY AND MAINTENANCE

Standard installation	-
Optional installation	Ceiling, Pendulum, Wall
exchangeable LED board	not possible

MATERIAL

Case color	grey RAL 7035
Renewable resources possible	no
Housing material	Fiberglass
Cover material	PC

The right of error and later technical developments is reserved.

State: 14.05.2020