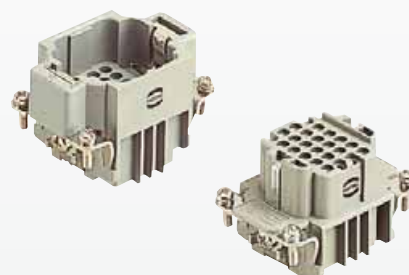


Number of contacts

24 +


Inserts

		Part No.		Drawing	Dimensions in mm
Identification	Series	Male insert (M)	Female insert (F)		
Crimp terminal Order crimp contacts separately	Han DD®	09 16 024 3001	09 16 024 3101	1) Distance for contact max. 21 mm Contact arrangement View from termination side Panel cut out for inserts for use without hoods/housings	

		Part No.		Drawing	Dimensions in mm
Identification	Wire gauge (mm²)	Male contacts	Female contacts		
Crimp contacts silver plated	0.14-0.37 0.5 0.75 1.0 1.5 2.5	09 15 000 6104 09 15 000 6103 09 15 000 6105 09 15 000 6102 09 15 000 6101 09 15 000 6106	09 15 000 6204 09 15 000 6203 09 15 000 6205 09 15 000 6202 09 15 000 6201 09 15 000 6206		
gold plated	0.14-0.37 0.5 0.75 1.0 1.5 2.5	09 15 000 6124 09 15 000 6123 09 15 000 6125 09 15 000 6122 09 15 000 6121 09 15 000 6126	09 15 000 6224 09 15 000 6223 09 15 000 6225 09 15 000 6222 09 15 000 6221 09 15 000 6226		
FOC contacts for 1 mm plastic fibre		20 10 001 3211	20 10 001 3221		

Stock items in bold type