Number of contacts

40 + ⏚

Inserts

Identification	Series	Part No. Male insert (M)	Part No. Female insert (F)	Drawing	Dimensions in mm
Crimp terminal Order crimp contacts separately	Han D®	**09 21 040 3001**	**09 21 040 3101**	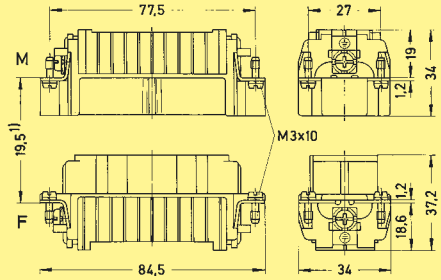 1) Distance for contact max. 21 mm	
Wrap terminal 1 x 1 mm	Han D®	09 21 040 2601	09 21 040 2701	Contact arrangement View from termination side 	

Identification	Wire gauge (mm²)	Part No. Male contacts	Part No. Female contacts	Drawing	Dimensions in mm
Crimp contacts					
silver plated	0.14-0.37	**09 15 000 6104**	**09 15 000 6204**	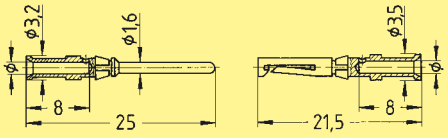	
	0.5	**09 15 000 6103**	**09 15 000 6203**		
	0.75	**09 15 000 6105**	**09 15 000 6205**		
	1.0	**09 15 000 6102**	**09 15 000 6202**		
	1.5	**09 15 000 6101**	**09 15 000 6201**		
	2.5	**09 15 000 6106**	**09 15 000 6206**		
gold plated	0.14-0.37	**09 15 000 6124**	**09 15 000 6224**		
	0.5	**09 15 000 6123**	**09 15 000 6223**		
	0.75	**09 15 000 6125**	**09 15 000 6225**		
	1.0	**09 15 000 6122**	**09 15 000 6222**		
	1.5	**09 15 000 6121**	**09 15 000 6221**		
	2.5	**09 15 000 6126**	**09 15 000 6226**		

Wire gauge		ø	Stripping length
0.14-0.37 mm²	AWG 26-22	0.90 mm	8 mm
0.5 mm²	AWG 20	1.10 mm	8 mm
0.75 mm²	AWG 18	1.30 mm	8 mm
1 mm²	AWG 18	1.45 mm	8 mm
1.5 mm²	AWG 16	1.75 mm	8 mm
2.5 mm²	AWG 14	2.25 mm	6 mm

FOC contacts for 1 mm plastic fibre		20 10 001 3212	20 10 001 3222	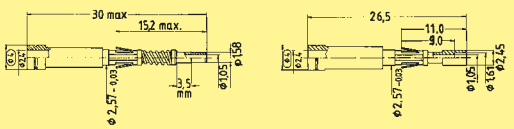	

Stock items in bold type