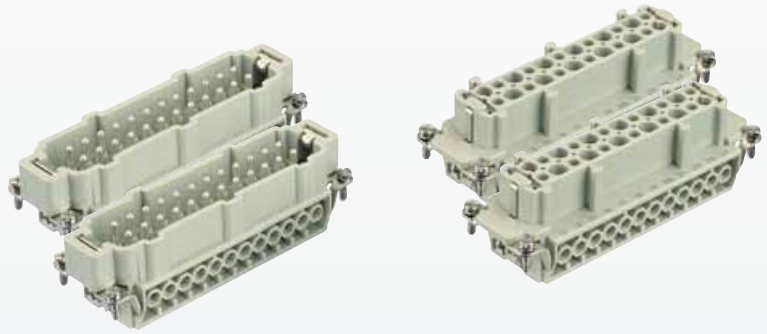
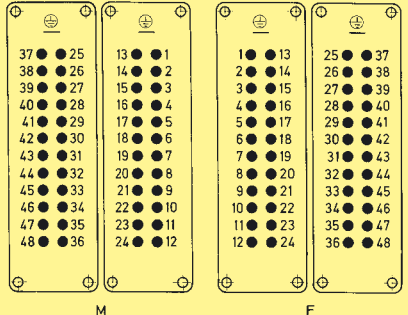


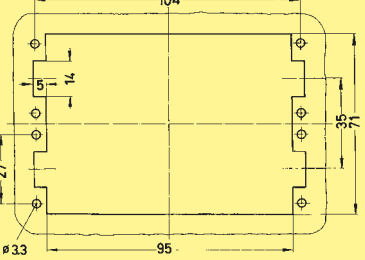
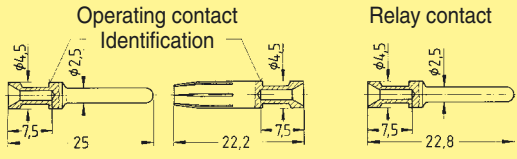

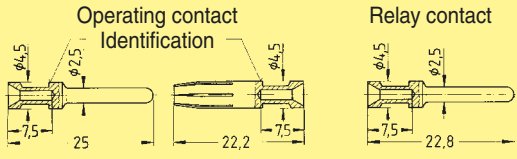



Number of contacts

48 + 

Inserts

Identification	Series	Part No.		Drawing	Dimensions in mm
		Male insert (M)	Female insert (F)		
Screw terminal with wire protection	Han E®			Dimensions for inserts see page 03.26	
	1–24 25–48	09 33 024 2601 09 33 024 2611	09 33 024 2701 09 33 024 2711	Contact arrangement View from termination side	
Cage-clamp terminal	Han® ES				
	1–24 25–48	09 33 024 2616 09 33 024 2626	09 33 024 2716 09 33 024 2726		
Cage-clamp terminal two terminals per contact	Han® ESS				
	1–24 1–24	09 33 024 2672 09 33 024 2672	09 33 024 2772 09 33 024 2772		
Crimpanschluss Order contacts separately	Han E®				
	1–24 25–48	09 33 024 2602 09 33 024 2612	09 33 024 2702 09 33 024 2712		

Wire gauge		Part No.		Drawing	Dimensions in mm
Identification	(mm²)	Male contacts	Female contacts		
Crimp contacts					
Power contacts		0.14-0.37	09 33 000 6127*	09 33 000 6227*	
		0.5	09 33 000 6121	09 33 000 6220	
		0.75	09 33 000 6114	09 33 000 6214	
		1.0	09 33 000 6105	09 33 000 6205	
		1.5	09 33 000 6104	09 33 000 6204	
		2.5	09 33 000 6102	09 33 000 6202	
		3	09 33 000 6106	09 33 000 6206	
		4	09 33 000 6107	09 33 000 6207	
silver plated					
Gold plated crimp contacts					
		0.14-0.37	09 33 000 6117*	09 33 000 6217*	
		0.5	09 33 000 6122	09 33 000 6222	
		0.75	09 33 000 6115	09 33 000 6215	
		1.0	09 33 000 6118	09 33 000 6218	
		1.5	09 33 000 6116	09 33 000 6216	
		2.5	09 33 000 6123	09 33 000 6223	
		4.0	09 33 000 6119	09 33 000 6221	
gold plated					
Relay contact silver plated					
		0.75-1	09 33 000 6109		
		1.5	09 33 000 6110		
		2.5	09 33 000 6111		
Coding Pin					
				09 33 000 9954	
To avoid accidental incorrect mating of adjacent connectors a coding system is required. Coding is effected – by means of a code pin. For this reason a female contact has to be inserted into the selected chamber. The code pin has to be assembled into this contact from the mating side. The opposite male contact is omitted. 					

* only to be used with BUCHANAN crimping tool 09 99 000 0001 and adjustment gauge 09 99 000 0203

Stock items in bold type