

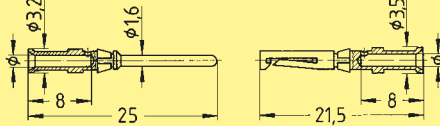

Number of contacts

8



Inserts

		Part No.		Drawing	Dimensions in mm
Identification	Series	Male insert (M)	Female insert (F)		
Crimp terminal Order Crimp contacts separately	Han D®	09 36 008 3001	09 36 008 3101		Contact arrangement View from termination side
For thermoplastic and metal hoods/housings					
Coding system with loss of contact 		09 33 000 9915	Use of the coding pin prevents incorrect mating to other connectors of the same type. The male pin should be omitted from the opposing cavity in the male insert. 		

Wire gauge		Part No.		Drawing	Dimensions in mm
Identification	(mm²)	Male contacts	Female contacts		
Crimp contacts					
silver plated	0.14-0.37	09 15 000 6104	09 15 000 6204		
	0.5	09 15 000 6103	09 15 000 6203		
	0.75	09 15 000 6105	09 15 000 6205		
	1.0	09 15 000 6102	09 15 000 6202		
	1.5	09 15 000 6101	09 15 000 6201		
	2.5	09 15 000 6106	09 15 000 6206		
gold plated	0.14-0.37	09 15 000 6124	09 15 000 6224		
	0.5	09 15 000 6123	09 15 000 6223		
	0.75	09 15 000 6125	09 15 000 6225		
	1.0	09 15 000 6122	09 15 000 6222		
	1.5	09 15 000 6121	09 15 000 6221		
	2.5	09 15 000 6126	09 15 000 6226		
FOC contacts for 1 mm plastic fibre					
		20 10 001 3212	20 10 001 3222		

Stock items in bold type