THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION -,- .
© COPYRIGHT – FGF ALL RIGHTS RESERVED.

LOC	DIST
G	14

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	T2	REVISED PER ECO-11-004587	11MAR11	RK	HMR

AMP WIRE RANGE	E13288	LR7189 Certified
22–16 AWG SOLID OR STRANDED	22–16 AWG SOLID OR STRANDED	22–16 AWG SOLID OR STRANDED

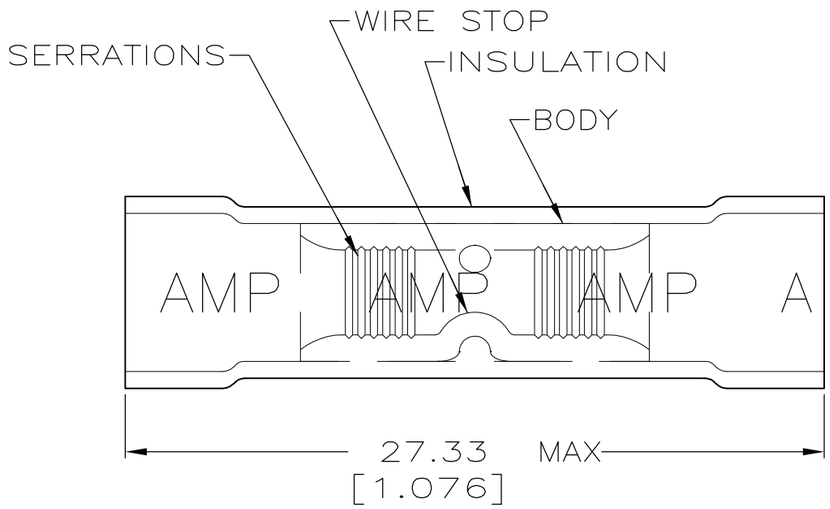

1. WIRE INSUL DIA, 2.67–3.56 [.105–.140]

△2 PRELIMINARY – NOT FOR PRODUCTION.

QTY	PACKAGE TYPE	PART NO
10,000	LOOSE PIECE, BULK	△2 34070-3
50	LOOSE PIECE, BAG	8-34070-5
5	LOOSE PIECE, BLS	8-34070-4
100	LOOSE PIECE, BOX	8-34070-1
2500	ON TAPE, REEL	1-34070-1
1000	LOOSE PIECE	34070

AMP INCORPORATED
CUSTOMER SERVICE SYSTEM

FOR ADDITIONAL PRODUCT INFORMATION OR COPIES OF DRAWINGS AND TECHNICAL DOCUMENTS	PRODUCT INFORMATION CENTER 1-800-522-6752
FOR APPLICATION TOOLING INFORMATION	TOOLING ASSISTANCE CENTER 1-800-722-1111
FOR ORDER ENTRY	1-800-526-5142

MAX RECOMMENDED OPERATING TEMPERATURE:
90° C [194° F]

VOLTAGE RATING:
600V MAX
1000V (FIXTURES OR SIGNS)

CIRCULAR MIL AREA:
0.26mm² – 1.65mm² [509–3260]

–

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm [INCHES]

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ± –
1 PLC ± –
2 PLC ± –
3 PLC ± –
4 PLC ± –
ANGLES ± –

MATERIAL
BODY, CU ASTM B 152
SLV, PVC, COLOR,RED

FINISH
TIN PLATE
PER MIL-T-10727

DWN	M ELLIS	19JUL95
CHK	C PRESNELL	19JUL95
APVD	S BORTNER	19JUL95
PRODUCT SPEC	UL486A	
APPLICATION SPEC	–	
WEIGHT	–	

TE Connectivity

NAME
SPLICE, BUTT, PLASTI-GRIP
WIRE SIZE, 22–16 AWG

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	00779	C-34070	–

CUSTOMER DRAWING | SCALE 4:1 | SHEET 1 OF 1 | REV T2