




VIPER 60–105 VA 230–240/11.6 V 50/60 Hz

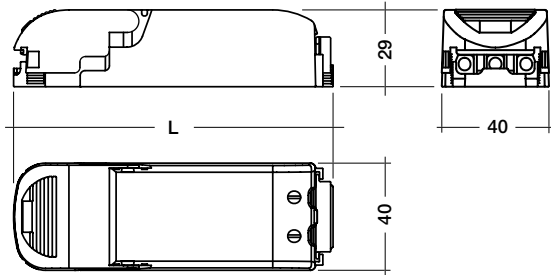

- short-circuit switch-off with automatic restart
- protection against overheating and overload
- compact dimensions
- large terminal compartment
- screw terminals for solid and flexible wires
- large terminals for looping of input wiring

- third terminal for terminating or looping of earth wire (non-functional)
- tool-free assembly of the strain-relief and terminal cover
- protection class 2

Packaging 60VA:
box of 20
252 boxes/pallet
5,040 pieces/pallet

Packaging 105VA:
box of 20
234 boxes/pallet
4,680 pieces/pallet

Approvals:
EN 55015
EN 61000-3-2
EN 61047
EN 61347-2-2
EN 61547

type		VIPER 60 VA 230–240/11.6 V 60 VA	VIPER 105 VA 230–240/11.5 V 105 VA
article number		22176072	22176074
primary voltage	V AC	230-240	230-240
input current at 240 V 50 Hz	A	0.26	0.45
frequency	Hz	50/60	50/60
typical secondary voltage at 230 V	V	11.3	11.0
typical secondary voltage at 240 V	V	11.6	11.5
lamp wattage	VA	20-60	35-105
power factor	λ	> 0.95	> 0.95
frequency of output	kHz	55	45
ambient temperature t_a	°C	0 → +50	0 → +45
rated max. temperature t_c	°C	70	85
softstart (time)	s	< 1	< 1
dimming		leading and trailing edge	leading and trailing edge
dimensions (LxWxH)	mm	120 x 40 x 29	141 x 40 x 29
weight	kg	0.100	0.126
secondary terminal		2-pole	4-pole