



WEVER & DUCRÉ
LIGHTING

LUNA

ROUND 1.0 PAR16

114120B0

Project
Type
Notes
Quantity
Date

GENERAL

Ceiling
Recessed
Jet Black
IP44
Interior
330^a to 335^b lm
RAL 9005^c

LED

Lamp PAR16
PAR16
Socket GU10
max. 10 W
CRI 80

OPTICAL

Wide Flood
UGR < 16
65° < 1500 cd/m²

PHYSICAL

Diameter 92 mm
Height 114 mm
0.24 kg


ELECTRICAL

100 - 240 V
Total connected power 6.6^b to 6.7^a W
PC2
Safety distance 0.3 m


CUTOUT

Diameter 76-83 mm
Min. ceiling thickness 4 mm
Recessed depth 120 mm


^a LED 3000K CRI 80 white
^b LED 2700K CRI 80 white
^c RAL Palette colors may deviate slightly due to production conditions.

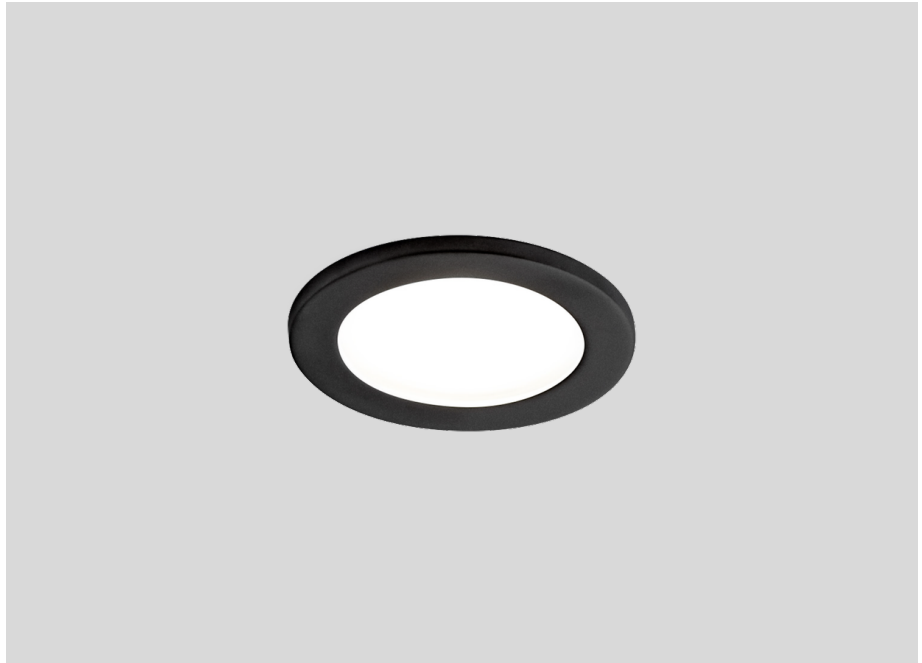

IP44 ±0,3



LIGHT DISTRIBUTION



[114120B0] The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors. The general terms and conditions of Wever & Ducré BV apply.
© Wever & Ducré BV · Spinnerijstraat 99/21 · 8500 Kortrijk · Belgium · www.weverducre.com



WEVER & DUCRÉ
LIGHTING

LUNA ROUND 1.0 PAR16

114120B0

MOUNTING

Plasterkit

TYPE	L · W · H (MM)	ORDERCODE
LUNA 1.0 ROUND	142-158-9.5	9 0 0 1 7 1 0 1

LED LAMPS

PAR16 LED Lamp

TYPE	COLOUR	Ø · H (MM)	ORDERCODE
2700K >90 CRI GU10	Black	Ø50-58	9 0 1 2 2 8 B 3
3000K >90 CRI GU10	Black	Ø50-58	9 0 1 2 2 8 B 5
2700K >90 CRI GU10	White	Ø50-58	9 0 1 2 2 8 W 3
3000K >90 CRI GU10	White	Ø50-58	9 0 1 2 2 8 W 5
2700K >80 CRI GU10	Silver	Ø50-52	9 0 5 2 2 7 S 2
3000K >80 CRI GU10	Silver	Ø50-52	9 0 5 2 2 7 S 4