



**LED POWER SUPPLY 700mA-DC /
36W DIM1**
300 90 128

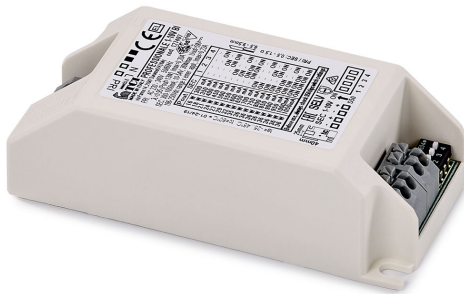

[View on website](#)

General info

LOCATION	interior
CUTOUT SHAPE/SIZE (MM)	round - 54
INGRESS PROTECTION	IP20
WEIGHT (KG)	0.178
INFORMATION	CURRENT CONTROLLED OUTPUT: 700mA-DC / 36W / 51V-DC $\lambda > 0,9$ Inrush current : 5A - 50 μ s @ 230V-AC Max. 50 units on circuit breaker B 16A

Electrical info

CLASS	II
DIM TYPE	1-10V

WHERE USED

321 107 93	SUPERLOOP HC 70 SBL 930
321 109 93	SUPERLOOP HC 90 SBL 930
321 207 93	SUPERLOOP HC 70 SPR 930
321 209 93	SUPERLOOP HC 90 SPR 930
321 407 93	SUPERLOOP VR 70 SBL 930
321 409 93	SUPERLOOP VR 90 SBL 930
321 507 93	SUPERLOOP VC 70 SBL 930
321 509 93	SUPERLOOP VC 90 SBL 930
20561 9300	SUPERLOOP PLUS HC 70 SBL 930
20562 9300	SUPERLOOP PLUS HC 90 SBL 930
20570 9300	SUPERLOOP HC SBL OVAL S 930
20572 9300	SUPERLOOP SLIM IN 70 SBL 930
20573 9300	SUPERLOOP SLIM IN 90 SBL 930
20576 9300	SUPERLOOP SLIM OUT 70 SBL 930
20577 9300	SUPERLOOP SLIM OUT 90 SBL 930
20580 9300	SUPERLOOP SLIM DOWN 70 SBL 930

Notes:

 DELTALIGHT®

LED POWER SUPPLY 700mA-DC / 36W DIM1

300 90 128