


## Blindstop, PG-schroefdraad

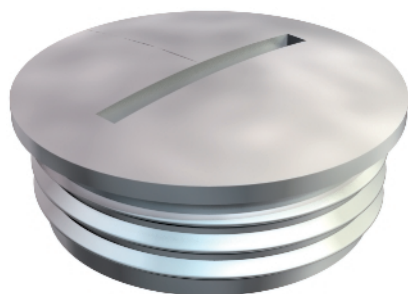

**Pg**

Sluitschroef N volgens DIN 46320, met Pg-schroefdraad volgens DIN 40430.  
Met afdichting type 107, 170 en 171 beschermingsgraad IP 68 (5 bar/1 h)  
\* Prijs conform DEL-notering.

Type	Schroef- draad	Afm. D	Afm- ting L	Verp. Stuk	Gewicht kg/100 st.	Bestelnr.
		mm	mm			
<b>168 MS PG 7</b>	Pg 7	14	5	100	0,410	<b>2090074</b>
<b>168 MS PG 9</b>	Pg 9	17	6	100	0,530	<b>2090090</b>
<b>168 MS PG11</b>	Pg 11	20	6	100	0,840	<b>2090112</b>
<b>168 MS PG13</b>	Pg 13,5	22	6,5	100	0,930	<b>2090139</b>
<b>168 MS PG16</b>	Pg 16	24	6,5	100	1,300	<b>2090163</b>
<b>168 MS PG21</b>	Pg 21	30	7	50	2,420	<b>2090201</b>
<b>168 MS PG29</b>	Pg 29	39	8	50	4,310	<b>2090295</b>
<b>168 MS PG36</b>	Pg 36	50	9	50	7,800	<b>2090368</b>
<b>168 MS PG42</b>	Pg 42	57	10	25	11,710	<b>2090422</b>
<b>168 MS PG48</b>	Pg 48	64	10	25	15,260	<b>2090481</b>

**CuZn** messing

**N** vernikkeld

### Afmetingen

