


Reductie, metrische schroefdraad

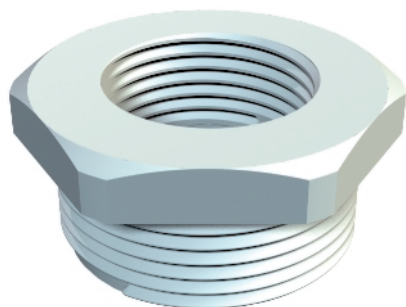


Reductie, met metrische binnen- en buitenschroefdraad.

Type	Schroefdraad buiten	Schroefdraad binnen	Kleur	SW mm	Verp. Stuk	Gewicht kg/100 st.	Bestelnr.
107 R M20-12 PA	M20	M12	lichtgrijs	24	100	0,500	2030616
107 R M20-16 PA	M20	M16	lichtgrijs	24	100	0,700	2030619
107 R M25-12 PA	M25	M12	lichtgrijs	32	100	0,850	2030624
107 R M25-16 PA	M25	M16	lichtgrijs	32	100	0,850	2030626
107 R M25-20 PA	M25	M20	lichtgrijs	32	100	0,650	2030628
107 R M32-12 PA	M32	M12	lichtgrijs	36	50	1,200	2030632
107 R M32-16 PA	M32	M16	lichtgrijs	36	50	1,100	2030634
107 R M32-20 PA	M32	M20	lichtgrijs	36	50	1,050	2030637
107 R M32-25 PA	M32	M25	lichtgrijs	36	50	1,000	2030640
107 R M40-16 PA	M40	M16	lichtgrijs	46	50	2,000	2030643
107 R M40-20 PA	M40	M20	lichtgrijs	46	50	1,850	2030646
107 R M40-25 PA	M40	M25	lichtgrijs	46	50	1,950	2030649
107 R M40-32 PA	M40	M32	lichtgrijs	46	50	1,400	2030652
107 R M50-20 PA	M50	M20	lichtgrijs	55	25	2,300	2030655
107 R M50-25 PA	M50	M25	lichtgrijs	55	25	2,250	2030659
107 R M50-32 PA	M50	M32	lichtgrijs	55	25	2,200	2030661
107 R M50-40 PA	M50	M40	lichtgrijs	55	25	2,050	2030664
107 R M63-25 PA	M63	M25	lichtgrijs	68	25	3,050	2030667
107 R M63-32 PA	M63	M32	lichtgrijs	68	25	3,070	2030670
107 R M63-40 PA	M63	M40	lichtgrijs	68	25	3,100	2030673
107 R M63-50 PA	M63	M50	lichtgrijs	68	25	3,000	2030675

PA Polyamide

Afmetingen



Belangrijke afmetingen reductie

G1	G2	SW	E	L1	L3
mm					
M20	M12	24	26,6	8	12
M20	M16	24	26,6	8	12
M25	M12	32	32	8	14
M25	M16	32	32	8	14
M25	M20	32	32	8	14
M32	M12	36	40	10	16
M63	M32	68	75	12	18
M63	M40	68	75	12	18
M63	M50	68	75	12	18
M40	M32	46	50,5	10	16
M50	M20	55	60	12	18
M50	M25	55	60	12	18
M50	M32	55	60	12	18
M50	M40	55	60	12	18
M63	M25	68	75	12	18
M32	M16	36	40	10	16
M32	M20	36	40	10	16
M32	M25	36	40	10	16
M40	M16	46	50,5	10	16
M40	M20	46	50,5	10	16
M40	M25	46	50,5	10	16