



www.YouTube.com/toxgermany

Properties

- Optimally aligned components
- Surface protection thanks to plastic washer with flange: Surface protection fixing
- Holds secure in almost all building materials


Description & application

- Original Tri all-purpose fixing for virtually all construction materials (see catalogue page 14)
- Plastic washers with flange
- M10 x 140 hanger bolts
- Metal disks and hexagonal bolts (SW 17)







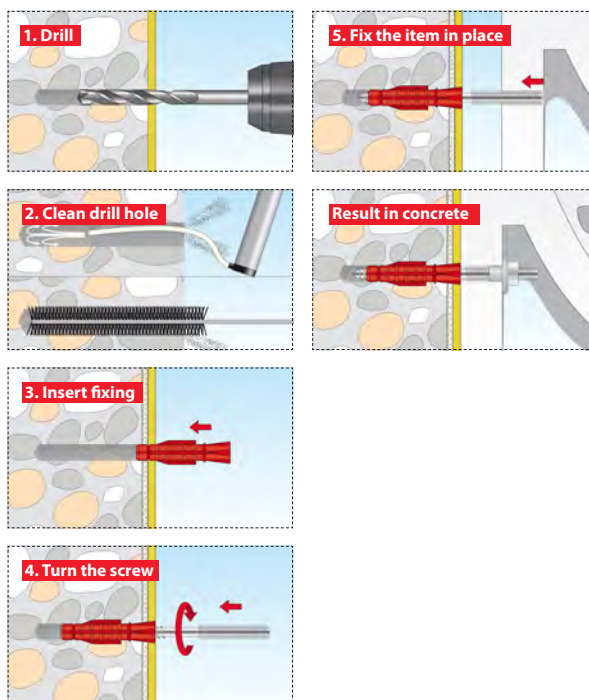







Handling & installation

- The plastic washer with flange provides protection for the ceramic bodies when installing the ceramic bodies
- Drill into perforated brick without impact to prevent the drill hole from becoming too large and webs in the perforated brick from breaking away
- Pre-positioned installation



Building materials



| Packaging | Art. no. | Type | Contents | Fixing \varnothing | Fixing length | Screw size | Drill \varnothing | Min. drill hole depth | Min. anchorage depth | Size of object to be mounted | Approval |
|---|---|---|------------------------|----------------------|---------------|------------|---------------------------|-----------------------|----------------------|------------------------------|----------------------------|
|  | Oase | | per pack | mm | mm | mm | d_0 \varnothing mm | h_1 \geq mm | h_{ef} mm | t_{fix} \leq mm | ETA / DIBt ■ / approval |
| | 045 101 03 |  | 2x | 14 | 75 | M10 x 140 | 14 | 100 | 75 | 40 | - |
| | |  | 2x | | | | | | | | |
| | |  | 2x | | | | | | | | |
| | |  | 2x (34x11x3 / DIN 440) | | | | | | | | |
| |  | 2x (M10 / DIN 934) | | | | | | | | | |
|  | Oase | | per pack | mm | mm | mm | d_0 \varnothing mm | h_1 \geq mm | h_{ef} mm | t_{fix} \leq mm | ETA / DIBt ■ / approval |
| | 045 701 031 |  | 2x | 14 | 75 | M10 x 140 | 14 | 100 | 75 | 40 | - |
| | |  | 2x | | | | | | | | |
| | |  | 2x | | | | | | | | |
| | |  | 2x (34x11x3 / DIN 440) | | | | | | | | |
| |  | 2x (M10 / DIN 934) | | | | | | | | | |

