


Article-No: 5261150

Diffuser Luminaires

## Luminaire LUNA N LED 1578mm 1x39W LOPRA 5000lm



Diffuser luminaire with MID-Power LEDs, housing made of grey, glass fibre reinforced polyester, LOPRA cover for glare-free and homogeneous illumination, single LED light points are not visible, seals made of age-resistant silicone foam, clip-lock made of stainless steel, metal gear tray, easy mounting through variable mounting points with PRACHT-CLIP-SYSTEM (stainless steel), suitable for ceiling mounting; pendulum, carrier rail and horizontal wall mounting possible with accessories. Attention: PRACHT MANUFACTORY! Do you need a different color temperature, housing color or through-wiring? Specific challenges? No problem. We deliver customized solutions.

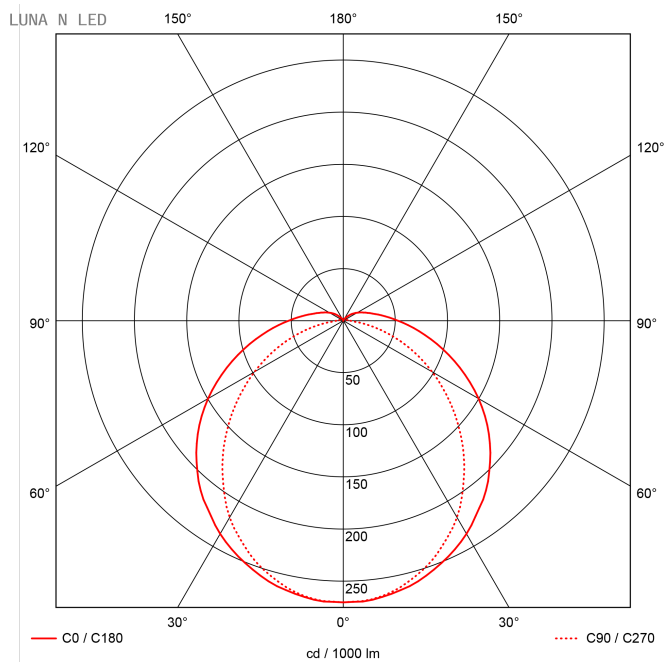

EAN 4018098221425

Statistical product number 94054039

## LAMP

Product type	LED
Number of lamps /LED-rows	1
Color temperature K	4.000
Color rendering index	>80
Amount LED	120
Color tolerance (initial MacAdam)	3

## POWER

Luminous flux lm	5000
Systempower W	39
Efficacy lm/W	128

## LIGHT ENGINEERING

Light distribution	wide beam
Light distribution angle in °	120
Unified Glare Rating UGR 4H 8H C0 C90	24.5 / 21.7

## TECHNICAL DATA

Nominal voltage	220-240V 0/50/60 Hz
Protection class SK	I
Ballast	LED-converter on/off
Through-wiring mm <sup>2</sup>	as optional accessories available
Glow wire test	650 °C - 5 sec.
D-rating	yes
Type of voltage	AC/DC
Circuit breaker B10A	15
Circuit breaker B16A	24
Circuit breaker C10A	24
Circuit breaker C16A	40

## CAPACITY

IK-Impact resistance	02
Warranty (years)	5
L80/B10 Lebensdauer bei 25°C	62000
L70/B50 Life expectancy at 25°C	
Unprotected outdoor areas	not suitable
max. lowest temperature in °C	-20
max. highest temperature in °C	35
Ingress protection class	66
Agricultural use	unsuitable

## DIMENSIONS AND WEIGHT

Length mm	1578
Width mm	86
Height mm	94
Weight netto in kg	2.5

## PACKAGING

Length m VPE	1.665
Width VPE in m	0.095
Height VPE in m	0.1
Weight incl. packaging kg	2.9

## ASSEMBLY AND MAINTENANCE

Standard installation	Ceiling
Optional installation	Pendulum, Rail installation, horizontal wall
exchangeable LED board	possible

## MATERIAL

Case color	grey RAL 7035
Renewable resources possible	no
Housing material	Fiberglass
Cover material	LOPRA

*The right of error and later technical developments is reserved.*

State: 14.05.2020